

Salient Features

- ✓ Redundant communication (CAN-Eth, Eth-Eth)
- ✓ Connects to easYgenXT and group controller
- ✓ Manage one or two breakers
- ✓ Touch screen remote operator panel
- ✓ Power measurement class 1
- ✓ Direct connect up to 690 Vac

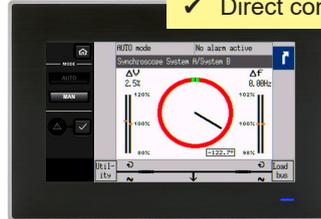

Multi-Breaker control for complex power management applications

Description

Woodward's easYgen | LS-6XT control is synchronizer controller with integrated mains decoupling and protection features. It enables several redundant communication schemes with peer controls. The applications range from independent synch check relay to complex power management system with multiple utility feeds, bus tie breakers and group breakers in combination with Woodward's easYgen-3400XT/3500XT equipped genset controllers and/or easYgen | GC-3400XT equipped genset groups. Redundant busses running among the peer controls ensure that availability of your power generation asset is not compromised to a single point of failure.

The LS-6XT control together with easYgen-3000XT controls are designed to support OEM switch-gear builders, generator packagers, and system integrators standardize on a single hardware for a multitude of utility parallel or island operations. Off-the-shelf LS-6XT control is software configurable for one/two breaker control, gensets / genset groups handling, and stand-alone/multi-unit application.

The LS-6XT controller is available in a rugged aluminum powder coated housing. An LED Annunciator plate is integrated to the front for local annunciation of alarms that are customizable on-site. Woodward RP-3000XT is supported over a separate Ethernet network that works as remote operator control panel.

Features

- Up to 32 LS-6XT controls are supported with up to 32 easYgen-3400XT/3500XT.
- Up to 64 LS-6XT are supported in one network with up to 16 GC-3400XT, each group consisting up to 31 gensets.
- In group controller applications that require the LS-6XT to work inside the group (with easYgens) AND outside the group (with group controllers), up to 32 LS-6XT can be used with easYgens and up to 64 LS-6XT can be used with group controllers.
- Purpose-built software to support single bus or redundant bus communications.
- Three independent true RMS AC measurement (system A, system B and auxiliary voltage).
- Remotely selectable breaker transition modes: Open, Closed (short parallel <100ms), Inter-change, Indefinite parallel.
- Internal power calculation with option to feed-in active power from external transducer.
- Phase match or slip frequency synchronization with voltage matching.
- Several built-in protection elements (including ROCOF, phase shift and flexible limits for custom protection).
- Segment control for the load sharing.
- Automatic date and time synchronization between the LS-6XT units and the connected easYgen-3400XT/3500XT controls.
- Detailed interface communication diagnostics to monitor, visualize and troubleshoot all the connected controls in the network.
- LS-6XT "Stand alone" mode without the easYgen-3400XT/3500XT is possible.
- Custom logic and configurable I/Os driven by LogicsManager and AnalogManger.
- HMI supported with RP-3000XT offering standard and customizable screens.


- Premium circuit breaker control for reliability demanding complex power management applications
 - Peak shaving operation
 - Import/Export operation
 - Islanded & Utility parallel operation
- Control up to 64 breakers on up to 128 bus segments in an application
- Purpose built application schemes
 - One/two breaker control
 - Gensets/genset groups handling
 - Stand-alone/multi-unit operation
- Forward and reverse synchronization between utility and genset group
- Redundant Ethernet communication
- Ethernet and RS-485 interfaces for remote control and visualization
- Customizable logic, HMI screens (with RP-3000XT) and alarms
- Adjustable vector groups for synchronization

Specifications


Power supply	12/24 Vdc (8 to 40 Vdc)
Intrinsic consumption.....	max. 22 W
Ambient temp. (operation)	-40 to 70 °C / -40 to 158 °F
Ambient temp. (storage).....	-40 to 80 °C / -40 to 176 °F
Ambient humidity.....	95 %, non-condensing
Voltage (software configurable)	(Y / Δ)
100Vac Rated (Vrated).....	.69 / 120 Vac
Max value (Vmax).....	.86 / 150 Vac
400 / 600 VAC Rated (Vrated).....	.400 / 690 VAC
Max. value (Vmax).....	.520 / 897 VAC
Rated surge Volt. (Vsurge).....	.6.0 kV
Accuracy.....	Class 0.5
Measurable alternator windings	
	3p-3w, 3p-4w, 3p-4w OD, 1p-2w, 1p-3w
Setting range primary.....	.50 to 650,000 Vac
Linear measuring range.....	.1.25×Vrated
Measuring frequency.....	.50/60 Hz (30 to 85 Hz)
High Impedance Input; Resistance per path.....	.2.5 MΩ
Max. power consumption per path.....	< 0.15 W
Current (Isolated, software configurable)	
Rated (Irated)1 A or 5 A
Linear measuring range.....	.I _{systemA} = 3.0×I _{rated}
	.I _{systemB} = 1.5×I _{rated}
Setting range1 to 32,000 A
Burden	< 0.10 VA
Rated short-time overcurrent (1 s).....	[1] 50×I _{rated} ,
	[5] 10×I _{rated}
Accuracy.....	Class 0.5

Power	
Setting range.....	.0.5 to 99,999.9 kW/kvar
Accuracy.....	Class 1.0
Discrete inputsisolated
Input range.....	.12/24 VDC (8 to 40 VDC)
Input resistance.....	.approx. 20 kΩ
Relay outputsisolated
Contact material.....	.AgNi
Load (GP).....	.2.00 Aac@250 Vac 2.00 Adc@24 VDC
Analog inputs (isolated)freely scalable
Type 1.....	.0 to 1 V / 0 to 2000 Ohms / 0 to 20 mA
Resolution.....	.16 Bit
Maximum permissible voltage against genset Ground.....	.9 V
Maximum permissible voltage genset Ground to PE.....	.100 V
Analog outputs (isolated) freely scalable	
Type 1.....	.± 10 V / ± 20 mA / PWM
Basic insulation voltage (AO#2).....	.500 Vac
Reinforced insulation voltage (AO#2).....	.300 Vac
Insulation voltage (AO#1).....	.100 Vac
Resolution.....	.12 Bit
Output ± 10 V (scalable).....	.Internal resistance
Output ± 20 mA (scalable).....	.Maximum load 500 Ω
HousingBack panel mounting,
	.Powder Coated Sheet metal housing
Dimensions W x H x D (P1):.....	.250 × 228 × 50 mm
Connection.....	.screw/plug terminals 2.5 mm ²
Protection system.....	.IP 20
Weight.....	.approx. 1,750 g
Listings.....	.CE, UL, cUL, EAC (pending)

APPLICATION

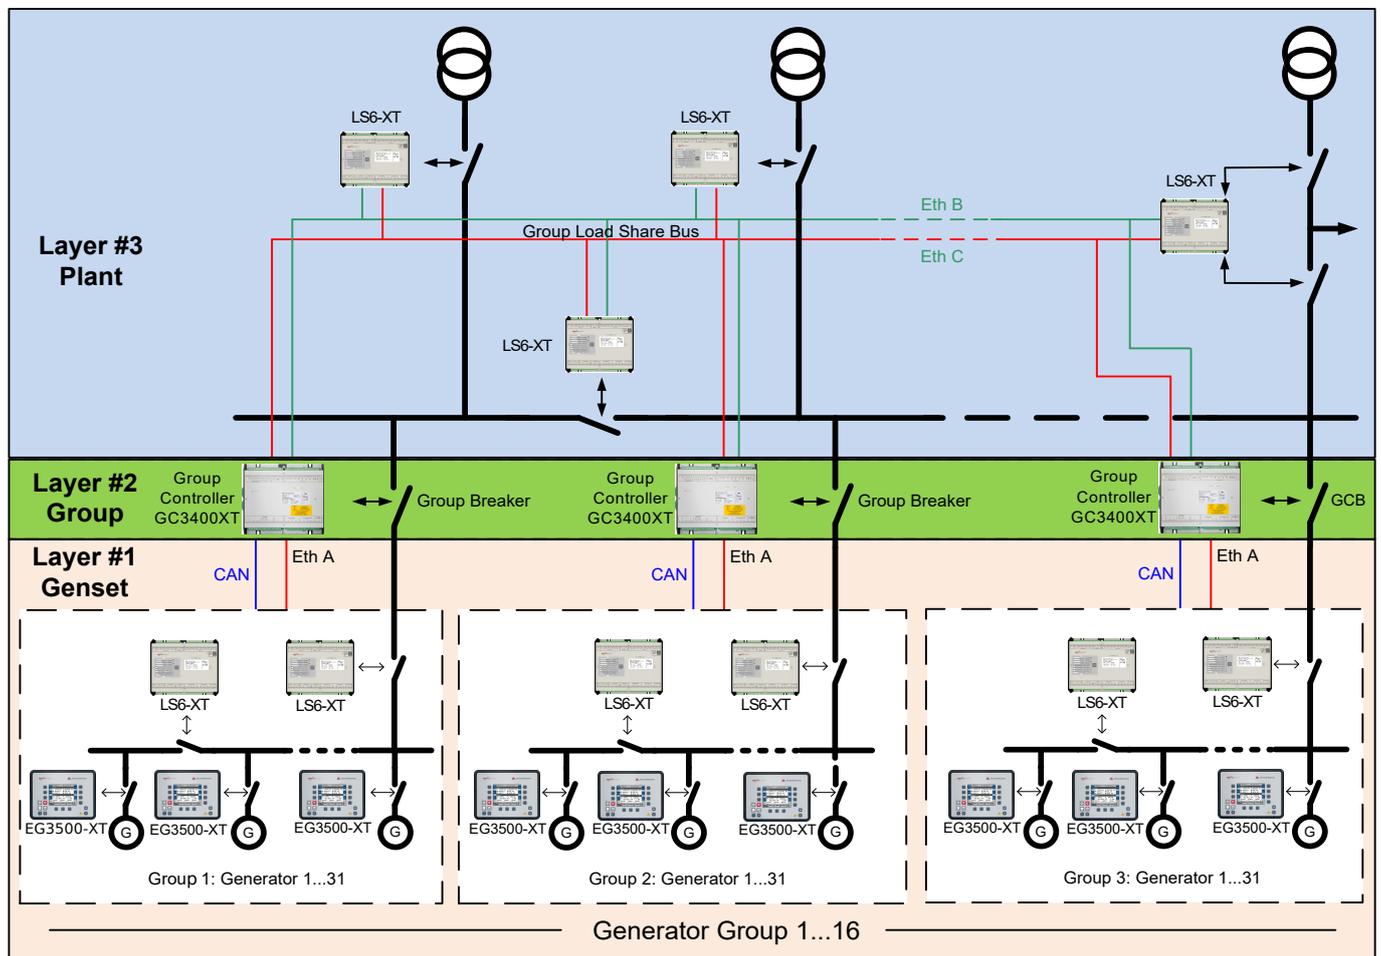

DIMENSIONS

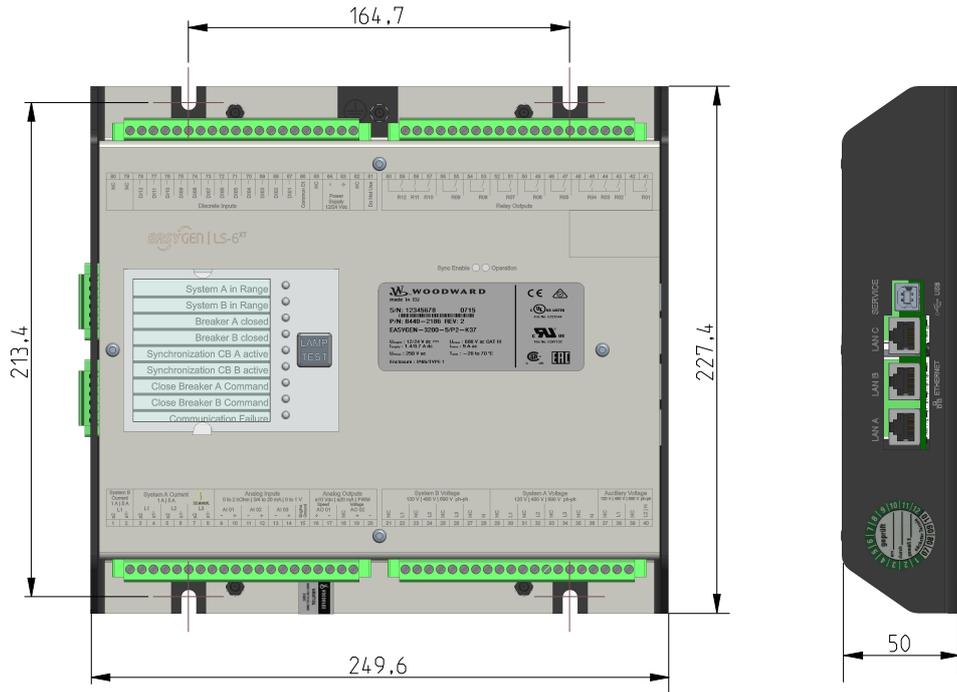

TERMINAL DIAGRAM

Screw terminals	CAN#1	Description	Ethernet		
			#C	#B	#A
41		Relay (R01) Isolated, Fixed to Ready for operation			
42		Relay (R01) Preconfigured to Alarm Alarm (01:02)			
43		Relay (R01) Preconfigured to System B KCC (02:03) or Preconfigured to System A KCC (02:11) or LogicData Manager			
44		Relay (R01) Isolated, Fixed to Close CB A			
45		Relay (R01) Isolated, Fixed to Open CB A or LogicData Manager			
46		Relay (R01) Isolated, Fixed to Close CB B or LogicData Manager			
47		Relay (R01) Isolated, Fixed to Open CB B or LogicData Manager			
48		Relay (R01) Isolated, Fixed to Close CB A			
49		Relay (R01) Isolated, Fixed to Open CB A			
50		Relay (R01) Isolated, Fixed to Close CB B			
51		Relay (R01) Isolated, Fixed to Open CB B			
52		Relay (R01) Isolated, Fixed to Close CB A			
53		Relay (R01) Isolated, Fixed to Open CB A			
54		Relay (R01) Isolated, Fixed to Close CB B			
55		Relay (R01) Isolated, Fixed to Open CB B			
56		Relay (R01) Isolated, Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
57		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
58		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
59		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
60		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
61		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
62		Relay (R01) Preconfigured to Alarm Alarm (01:02) or LogicData Manager			
63		Power supply Isolated, 8 to 40 Vdc ±2			
64		NC			
65		Earth			
66		Earth			
67		Earth			
68		Earth			
69		Earth			
70		Earth			
71		Earth			
72		Earth			
73		Earth			
74		Earth			
75		Earth			
76		Earth			
77		Earth			
78		Earth			
79		Earth			
80		Earth			

RELATED PRODUCTS

- Genset Controller easYgen-3400/3500XT (Product Specification # 37583)
- Group Controller easYgen | GC-3400XT-P1 (Product Specification # 37896)
- ToolKit (Product Specification # 03366)
- LDSS Emulation Tool (Product Specification # 37897)
- RP-3000XT (Product Specification # 37594, P/N: 8446-1061)
- DataTelegramMapper Tool (Application Note # 37684)
- Localization tool (P/N: 10-011-569)

**Contact:****North & Central America**

☎ +1 (208) 278 3370
 ☎ +1 (970) 962-7272
 ✉ SalesPGD_NAandCA@woodward.com

South America

☎ +55 19 3708 4760
 ✉ SalesPGD_SA@woodward.com

Europe

☎ Stuttgart: +49 711 78954 510
 ✉ SalesPGD_EMEA@woodward.com

Middle East & Africa

☎ +971 (2) 678 4424
 ✉ SalesPGD_EMEA@woodward.com

Russia

☎ +49 711 78954-515
 ✉ SalesPGD_EMEA@woodward.com

China

☎ +86 512 8818 5515
 ✉ SalesPGD_CHINA@woodward.com

India

☎ +91 124 4399 500
 ✉ Sales_India@woodward.com

ASEAN & Oceania

☎ +49 711 78954 510
 ✉ SalesPGD_ASEAN@woodward.com

www.woodward.com

Subject to alterations, errors excepted.

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to stgt-doc@woodward.com

For more information please contact:

FEATURES OVERVIEW

EASYGEN LS-6^{XT}		easYgen LS-6XT
Model		LS-612
Package		P1
Measuring		
System A voltage	(up to 690 VAC)	3-ph
System A current	(1 A or 5 A software selectable)	3-ph
System B voltage	(up to 690 VAC)	3-ph
System B current	(1 A or 5 A software selectable)	1-ph
Auxiliary voltage	(up to 690 VAC)	1-ph
Control		
Breaker control logic (open and closed transition <100 ms)	FlexApp™	1 / 2
Number of supported Woodward LS-6 units with easYgen-3400/3500XT		32
Number of supported Woodward LS-6 units with easYgen GC-3400XT		64
Single and multiple-unit operation		✓
Auto, Manual and test operating modes		✓
Breaker synchronization (+/- slip frequency / phase matching)		✓
Vector group adjustment for synchronization		✓
Configurable dead bus closure direction		✓
GGB (Generator Group Breaker) Control		✓
Import / export control (kW and kvar)		✓
HMI		
RP-3000XT support	DynamicsLCD™	✓
Configuration via PC		✓
Event recorder with real time clock (battery backup)		✓
Date and Time Sync. between LS-6XT, easYgen-3400XT/3500XT and GC-3400XT		✓
Configurable LEDs on Faceplate, x8		✓
Protection (Equivalent ANSI #)		
Over/undervoltage (59/27)		✓
Over/underfrequency (81O/U)		✓
Voltage asymmetry (47)		✓
Phase shift (78)		✓
df/dt (ROCOF) (81)		✓
QV monitoring		✓
Time-dependent voltage		✓
Mains voltage increase (accord. to VDE-AR-N-4105)		✓
Synch-Check (25)		✓
Monitoring		
Breaker open/close monitoring		✓
Synchronization time out monitoring		✓
Voltage Plausibility		✓
Freely configurable alarms		✓
Flexible Limits		✓
I/Os		
Discrete alarm inputs (configurable)	LogicsManager™	12 (11)
Discrete outputs (configurable)	LogicsManager™	12 (11)
Analog inputs configurable	FlexIn™	3
Analog outputs: ± 10V, ± 20mA, PWM; configurable	AnalogManager™	2
CAN bus communication interfaces	FlexCAN™	1
Ethernet Modbus TCP Slave interface		3
USB Serial interface		1
RS-485 Modbus RTU Slave interface		1
Listings/Approvals		
UL / cUL Listing (61010 ,6200)		✓
CE		✓
EAC		Pending
Part Numbers P/N		
Cabinet back mounting w / o display		8440-2222
Spare connector KIT		8923-2319